



NOTIFICATION OF STAKEHOLDER CONSULTATIONS


CEC NO. 6809/2024

Heritage Petroleum Company Limited ("Heritage"), as part of its exploration and production license for "Preau Block", is seeking to engage stakeholders for the intended drilling of two (2) exploration wells. The wells are carded to be drilled within the yellow shaded area below.

Project Activities

Activities to be undertaken at the Project Site:

- **Pre-Drilling Works** - Equipment Mobilization to Site, Aggregate Stockpiling, Foundation and Cellar, Laydown and Matting Corduroy, Mud Pits, Earthworks
- **Drilling Operations** - Mobilization of Land Rig Package to Proposed Well Site, Installation of Land Rig Package, Drilling, Evaluation, Casing and Cement
- **Post Drilling** - Mobilization of Rig, Perforation and Testing on Location, Demobilization of Equipment
- **Facilities** - Well Testing Package Including Process, Mechanical, Instrumentation, Control and Electrical Equipment

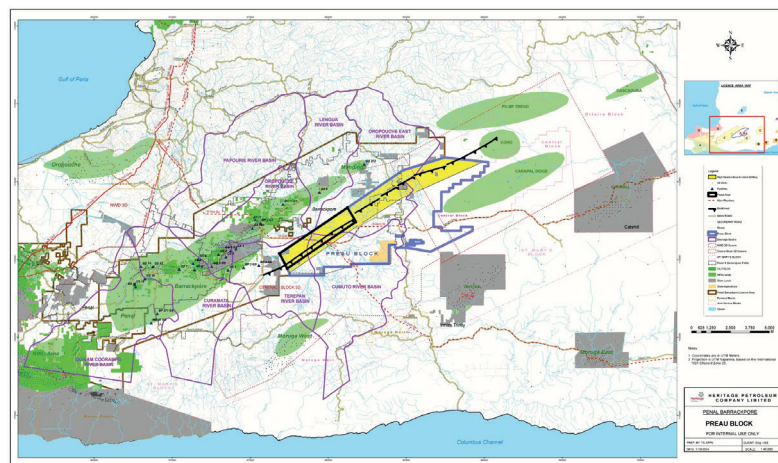

Potential Impacts and Mitigation Measures

Potential Impacts

Mitigation Measures

Dust Generation from the Transportation of Equipment and Materials; Clearing of Areas, Excavation and Exhaust from Vehicles and Equipment

Vehicles used to transport materials are to be covered. Wetting of earthworks and haul roads to control dust. Stockpiles will be kept to a minimum and used as soon as practical. Smaller stockpiles will be covered and wet intermittently. All equipment used in the drilling programme to be maintained. Ambient Air Quality Monitoring will be conducted during drilling operations.

Noise and Vibration

It is expected that the noise generated will be within the limits of the Noise Pollution Rules, 2001. Generators used onsite will be enclosed in housing to reduce level of noise emitted. The appropriate setback distance will be used between well sites and residents.

Soil and Water Contamination

Earthen berms will be constructed around the drilling pit in low lying areas to direct storm water away from the pit. Temporary earthen drains will be constructed and maintained to transport storm water and prevent flooding and silt run off. Any road that has been affected by the transportation of heavy equipment and materials will be restored.

Domestic Solid Waste Generated During Activities

Domestic waste will be collected in covered bins and disposed of by an approved contractor.

Road Traffic Congestion

A schedule for the delivery of equipment along public roads for off peak traffic periods will be developed.

Clearing of Vegetation, Excavation Works, Construction of Drilling Pit

There will no clearing of primary vegetation. Only shrubs and small trees will be cleared. Drilling Pits will be constructed as per CEC Requirements to minimize risk of erosion and flooding.

Well Blowouts or Hydrocarbon Leak

In the event of a well blowout or hydrocarbon leak, Heritage will activate the Well Blowout Plan or Land Oil Spill Contingency Plan, respectively.

You are invited to attend any one of the following Public Consultations on this project:
Wednesday 23rd April 2025 | Barrackpore Regional Complex | 4:30 p.m.
Thursday 24th April 2025 | St. Mary's Government Primary School | 4:30 p.m.

You can also submit your questions and comments concerning this project to Community@heritage-tt.com